

GLOBAL SYN-TI

Product Specification Sheet

Double S-72





III USES


- Landscape
- Lawns
- **Playgrounds**
- **Traffic Medians**
- Pet Areas
- Commercial or Residential
- Light-Heavy Traffic



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

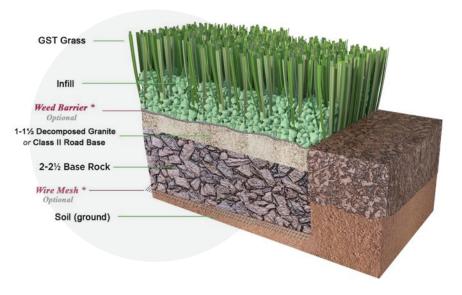

DOUBLE S BLADE

SPECIFICATIONS

Pile Height: 1-7/8"

Turf Gauge: 3/8"

Face Weight: 72 oz./yd²

Backing Weight: 35 oz./yd²

Total Weight: 107 oz./yd²

Stitch Rate: 15/10cm

Stitches/M2: 15750

Material/Dtex: PE/PP16400

Color: Matte Emerald Green and Olive Bicolor

with Brown and Green Thatching

Type Of Fiber: **PE Monofilament and PP Curled**

As Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 17+ Ib/force (ASTM D1335)

Blade Type: Double S Blade

Permeability: 155.6 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >300 lb./force (ASTM D5034)

Grab Tear CMD: >200 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500

Total Roll Weight: 1093 lbs

