




GLOBAL SYN-TURF
GREENING PLANET EARTH

Product Specification Sheet



Trainers Turf-63

USES


- ▶ Pet Areas
- ▶ Sports
- ▶ Landscape
- ▶ Commercial or Residential
- ▶ Medium-Heavy Traffic



15 Year Manufacturer's Warranty
8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

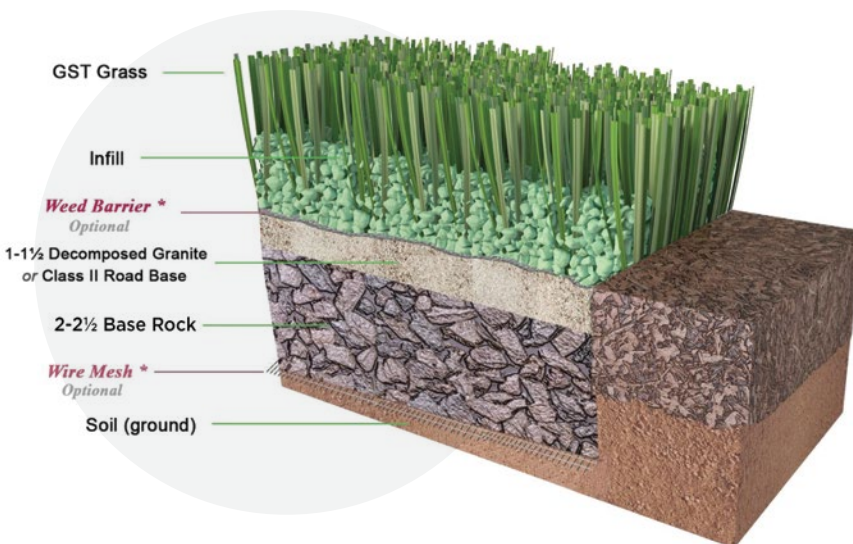

STEMGRASS BLADE

SPECIFICATIONS

Pile Height: 1-1/4"

Turf Gauge: 3/8"

Face Weight: 63 oz./yd²

Backing Weight: 29 oz./yd²

Total Weight: 92 oz./yd²

Stitch Rate: 16/10cm

Stitches/M²: 16800

Material/Dtex: PE12500 + PP4000

Color: Emerald Green and Olive Green with Green Thatching

Type Of Fiber: PE Monofilament Diamond Shaped Stemgrass and PP Curled As Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 9+ lb/force (ASTM D1335)

Blade Type: Stemgrass Blade

Permeability: 62.9 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >200 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500

Total Roll Weight: 894 lbs

