



GLOBAL SYN-TURF

GREENING PLANET EARTH

Product Specification Sheet



Olive-51

USES


- ▶ Landscape
- ▶ Lawns
- ▶ Traffic Medians
- ▶ Pet Areas
- ▶ Commercial or Residential
- ▶ Light-Heavy Traffic



15 Year Manufacturer's Warranty
8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

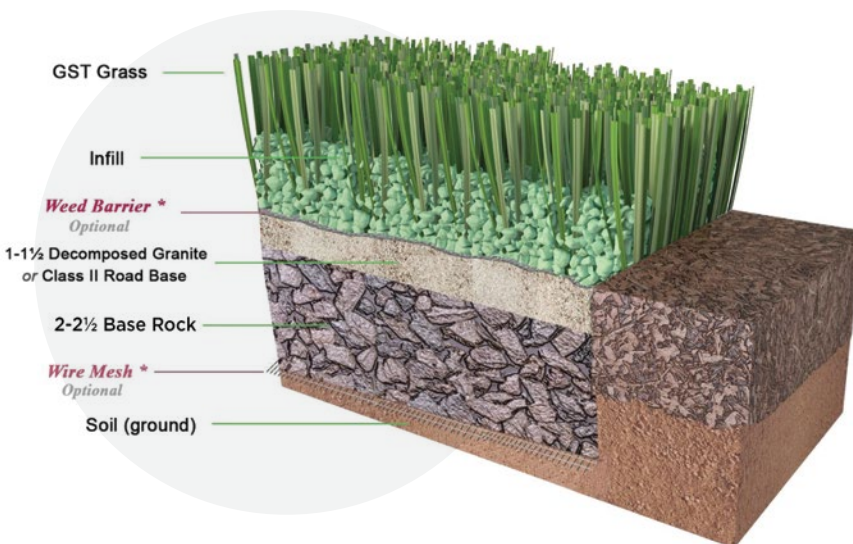

VALLEY BLADE

SPECIFICATIONS

Pile Height: 1-½"

Turf Gauge: 3/8"

Face Weight: 51 oz./yd²

Backing Weight: 26 oz./yd²

Total Weight: 77 oz./yd²

Stitch Rate: 14/10cm

Stitches/M²: 14700

Material/Dtex: PE9000 + PP4000

Color: Field Green & Olive Green with Brown and Green Thatching

Type Of Fiber: PE monofilament and PP Curled Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 14+ lb/force (ASTM D1335)

Blade Type: Valley Blade

Permeability: 84.6 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >170 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500

Total Roll Weight: 790 lbs

